

BLANCO LUNEOO-S

Montageanleitung

Assembly instructions • Instrucciones de montaje • Istruzioni di montaggio
Instructions de montage • Montagehandleiding

blanco.com



Contents



1. Safety	18
1.1 General information	18
1.2 Intended use	19
1.3 Restrictions on the user group	19
1.4 Safe installation	19
1.5 Safe use	20
2. Avoiding property damage	20
3. Environmental protection	20
4. Assembling and connecting	20
4.1 Scope of delivery	20
4.2 Criteria for the installation location	21
4.3 Fitting the mixer tap	21
4.4 Preparing the mixer tap for first use	30
5. Shutting down	31
6. Disposing of the mixer tap	31
7. Customer service	31



1. Safety

Please observe the following instructions.

1.1 General information

These assembly instructions are part 1 of a total of 2 manuals. You will find the manual number on the cover page of the document.



- ▶ Please read these instructions and the other instructions carefully before assembling and using the product to ensure correct assembly and safe use of the product.
- ▶ Ensure that you follow the instructions and the work steps in the specified order.
- ▶ Observe the safety instructions and the installation requirements.
- ▶ Pay attention to the indicator elements on the components: the LED ring on the mixer tap control unit.
- ▶ Keep the manuals and product information in a safe place ready to use at a later date or pass on to the subsequent owner.
- ▶ Do not connect the mixer tap if it has been damaged during transport.

1.2 Intended use

The mixer tap is designed for use in the European Union. Use in other countries is at your own risk. You must check the legal and structural requirements in the place of use.

The system was designed for private use, usually within a kitchen space.

Any operation beyond the intended usage or any other use is considered misuse. BLANCO accepts no liability for any damage caused by misuse.

1.3 Restrictions on the user group

Children aged 8 or over and people with reduced physical, sensory or mental capabilities or lacking in experience and knowledge may only use the mixer tap under supervision or if they undergo a suitable briefing on safe usage and they are aware of the associated risks and hazards. Children must not play with the mixer tap. Children must not carry out cleaning and user maintenance without supervision.

1.4 Safe installation

WARNING Danger posed by magnetic field!

The spray head holder and the spray head itself contain a strong magnet. This magnetic field can prevent a pacemaker from functioning properly!

► Individuals with a pacemaker should keep a distance of at least 25 cm.

NOTICE!

Maintain cleanliness! Careless handling can cause problems with water hygiene.

- Keep water-conducting parts such as seals, threads and hose connections clean. Only touch after cleaning your hands thoroughly.
- Do not touch any surfaces that come into contact with drinking water after installation.

1.5 Safe use

! WARNING Risk of suffocation!

Children can pull packaging material over their heads or wrap themselves in it and suffocate!

- ▶ Keep packaging material away from children.
- ▶ Do not allow children to play with packaging material.

Children can inhale or swallow small parts and choke as a result!

- ▶ Keep small parts away from children.
- ▶ Do not allow children to play with packaging material.

2. Avoiding property damage

Damage, incorrect installation and improper repairs can cause leaks and considerable property damage.

- ▶ Only trained specialists may install and connect the mixer tap. BLANCO assumes no liability for improper or non-professional installation.
- ▶ Cables and hoses must be routed in such a way that they cannot be damaged. If you use a waste system, you must pay special attention and ensure that cables and hoses cannot become caught or damaged.
- ▶ Never put a damaged mixer tap into operation.
- ▶ Only trained specialists may repair the mixer tap.
- ▶ Have damaged parts replaced by a professional.
- ▶ Only original spare parts may be used to repair the mixer tap.

3. Environmental protection

The packaging materials are environmentally friendly and recyclable.


- ▶ Sort and dispose of each individual part by material type.



4. Assembling and connecting

4.1 Scope of delivery

After unpacking the delivery, check all parts for transport damage and ensure they are complete. The delivery consists of the parts shown here and two manuals. If you have any complaints, please contact your dealer or our customer service
→ see rear page.

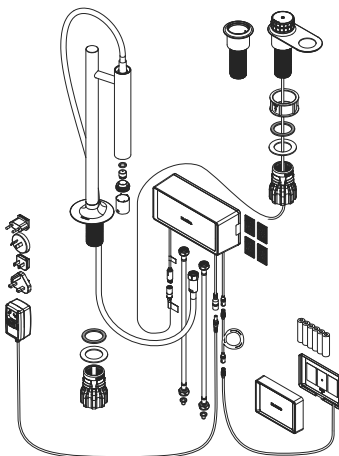

4.2 Criteria for the installation location

Water connection requirements

- Constant drinking water quality
- Constant flow pressure

Hot water corner valve

- Maximum temperature 70 °C (158 °F)
- Maximum pressure 10 bar (145 psi)


Cold water corner valve

- Temperature 5 - 30 °C (40 - 86 °F)
- Pressure 1 - 10 bar (14.5 - 145 psi)

Tap hole requirements


The sink or worktop must have a tap hole 35 mm in diameter; thickness of the worktop: 10 - 50 mm.

4.3 Fitting the mixer tap

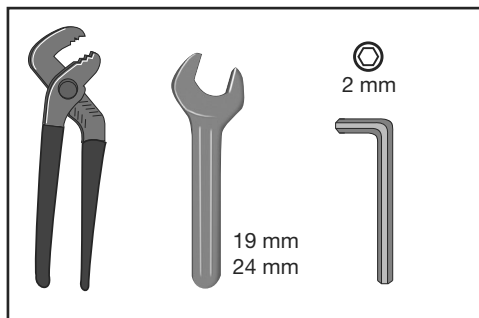


Required tools:

- Pliers
- Wrench, width 19 mm
- Wrench, width 24 mm
- Hexagon socket spanner (hex key), 2 mm

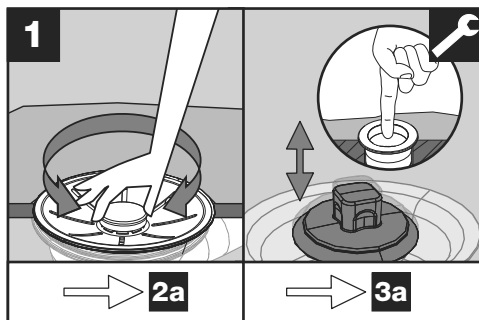


Check whether the kitchen sink drain works with or without the drain remote control.

- Without drain remote control:
Continue with step 2a
- With BLANCO PushControl drain remote control: Continue with step 3a

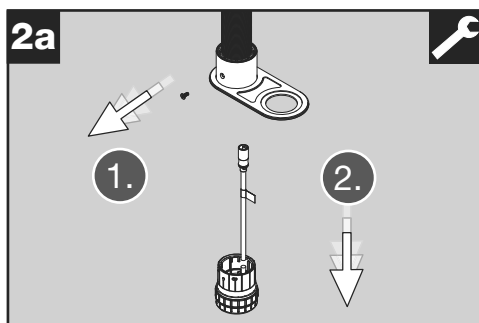

Only for sinks without drain remote control:


Unscrew the small locking screw on the holder using a hexagon socket spanner (2 mm hex key). Remove the operating element.

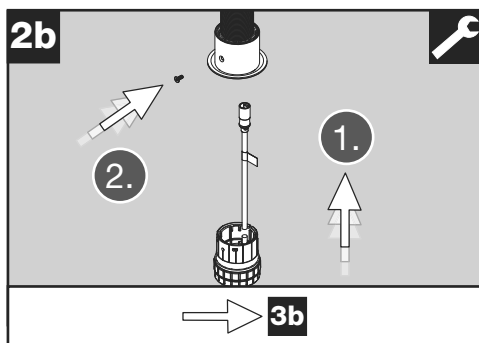

Only for sinks without drain remote control:

Install the operating element into the holder without a hole and fasten it into place with the locking screw.

Continue with step 3b.

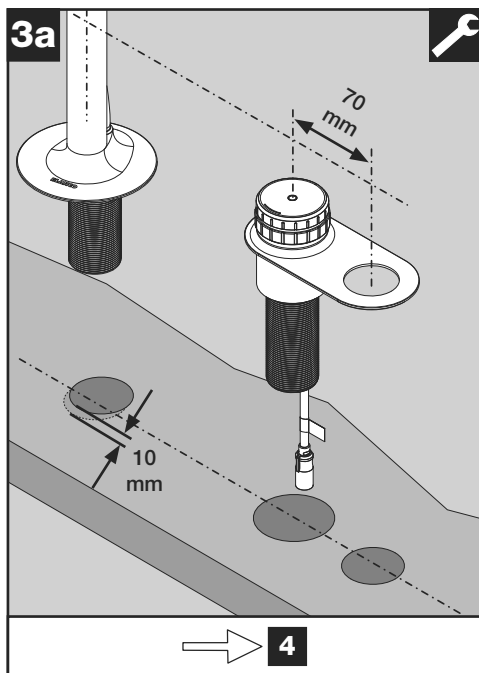

With BLANCO PushControl drain remote control:


A total of three holes are required: Two holes 35 mm in diameter (the tap hole for the mixer tap and the hole for the BLANCO PushControl drain remote control) and one hole 50 mm in diameter for the operating element. The two holes in the operating element are 70 mm apart.

NOTICE!

The mixer tap's threaded pipe is set back 10 mm (3/8") in relation to the mixer tap's body!

If the operating element and the mixer tap body are fitted in a row, the hole for the mixer tap must be set back 10 mm.

Continue with step 4.

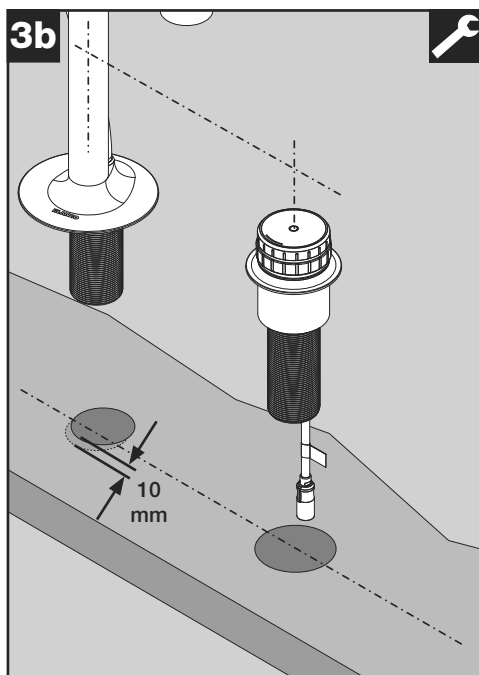


Only for sinks without drain remote control:

A total of two holes are required: The tap hole for the mixer tap, 35 mm in diameter, and one hole for the operating element, 50 mm in diameter.


NOTICE!

The mixer tap's threaded pipe is set back 10 mm (3/8") in relation to the mixer tap's body!

If the operating element and the mixer tap body are fitted in a row, the hole for the mixer tap must be set back 10 mm.

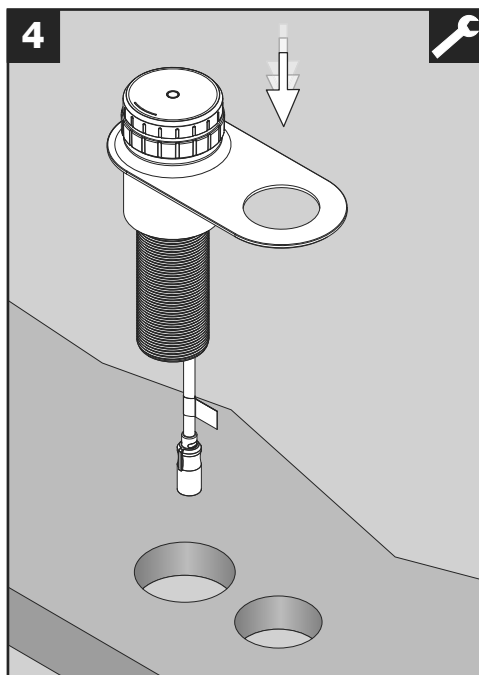


Insert the holder with the operating element into the hole(s).

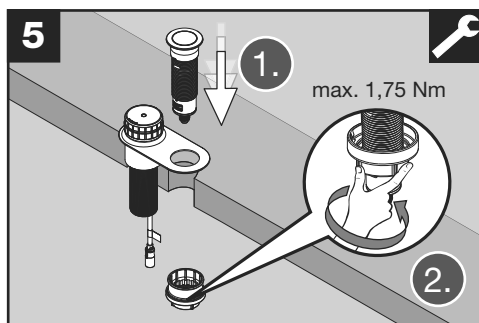

With BLANCO PushControl drain remote control:


Fit the PushControl element (included in the scope of delivery with the sink drain set) into the operating element and screw into place.

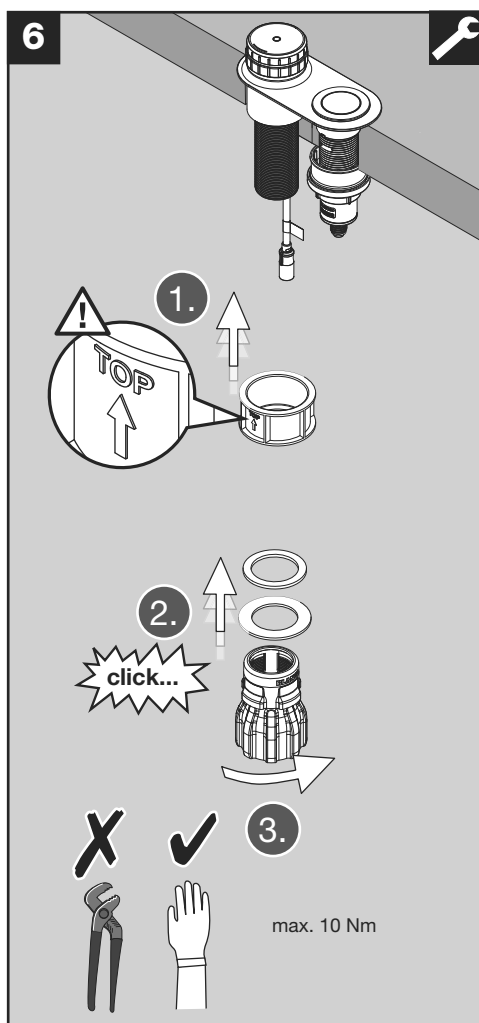

Fasten the operating element with the spacer sleeve and the assembly kit.


Ensure the spacer sleeve is installed in the correct position

First push the mounting nut upwards and then tighten it by hand.

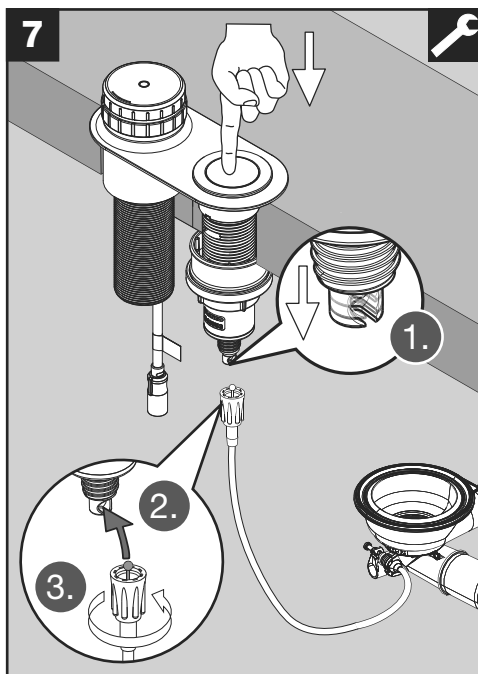


With BLANCO PushControl drain remote control:

Connect the drain set Bowden cable to the PushControl drain remote control.

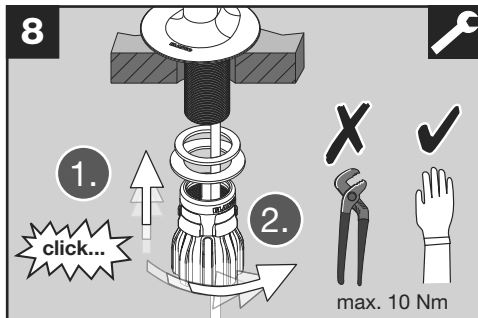

Fasten the mixer tap with the assembly set.

First push the mounting nut upwards and then tighten it by hand.

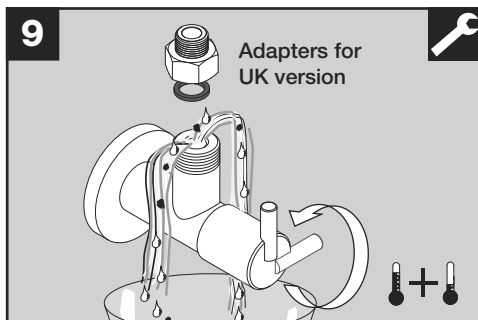


Purge both corner valves until clean water comes out.

For the UK and Ireland only:

Thread adapters from 1/2" to 3/8" are required for the **UK version**. These are NOT included in the scope of delivery.

Fit thread adapters to the corner valves.

Ensure that a seal is inserted.

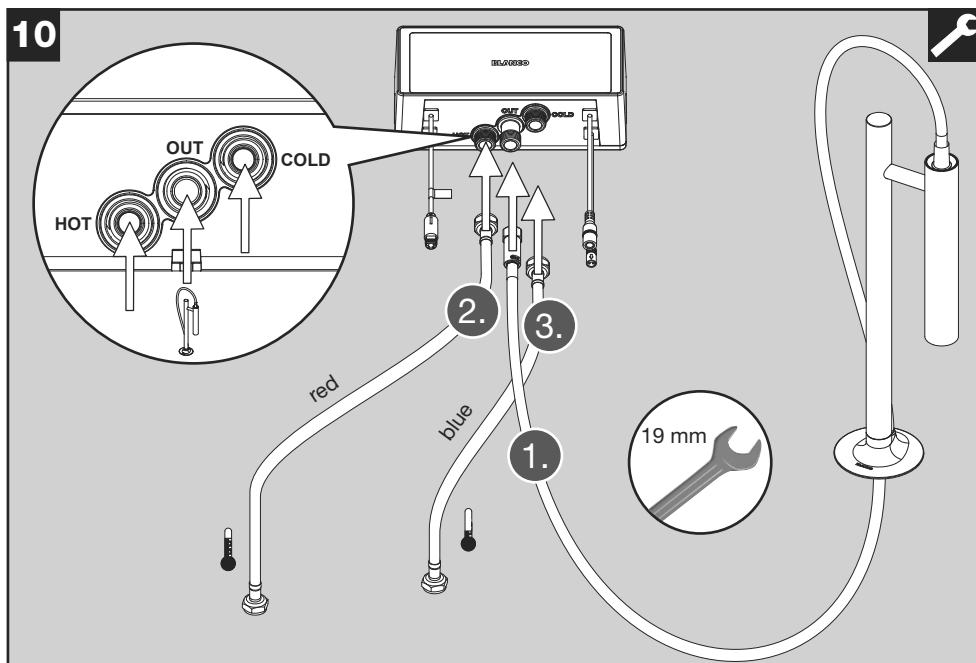


Fit three hoses to the control box:

NOTICE!

Do NOT kink or twist the spray hose! The spray hose is adjustable in length but cannot be pulled out.


1. **CENTRE (OUT):** Mixer tap spray hose
2. **LEFT (HOT):** red flexible hose for hot tap water
3. **RIGHT (COLD):** blue flexible hose for cold tap water

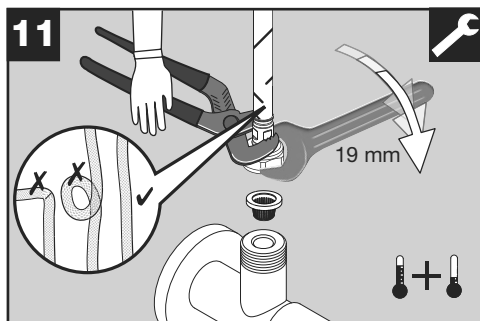


NOTICE!

Hoses must not be twisted or kinked!

- ▶ Install the hoses so that they are straight and secure them against twisting when tightening the nut. Ensure that a sieve seal is inserted.
- Attach the red flexible hose from the mixer tap to the hot water corner valve (left).
- Attach the blue flexible hose to the cold water corner valve (right).

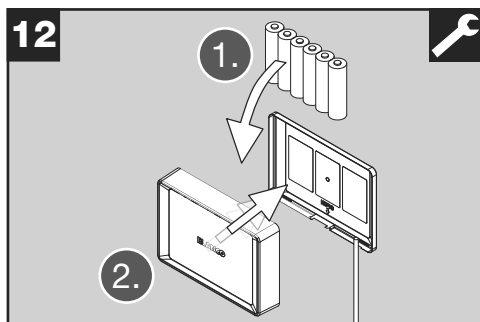

Insert six AA/LR6 batteries (included in delivery) into the battery box and close it.

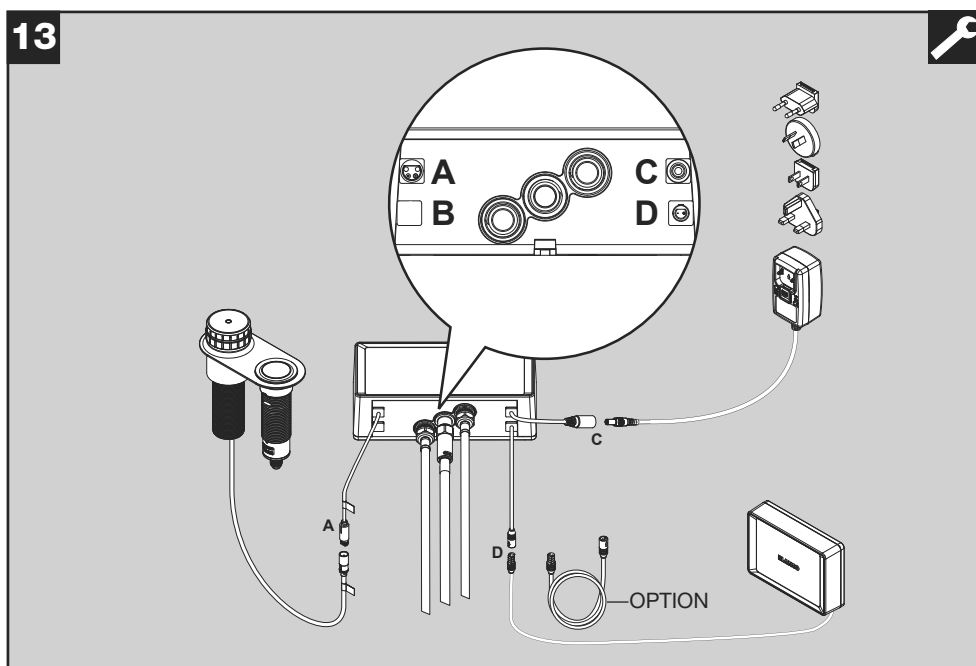


Fitting the cables to the control box:

1. Plug the cable from the operating element with the yellow tag into connection A. Cable A also features a yellow tag.
2. Connect the power supply unit to cable C.
3. Connect the battery box to cable D. You can use the optional extension cable if you wish.


NOTICE!

For correct functionality the AC adapter (C) AND the battery box (D) are needed!


14 Option A




1.



2.




3.




4.


Option B

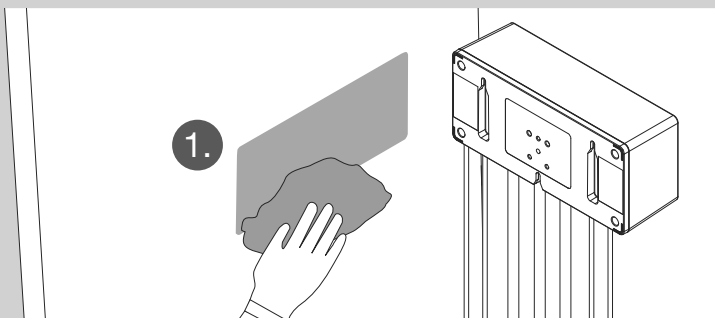


1.




2.



3.



4.




Installing the control box:

The delivery includes two Velcro adhesive strips. These can optionally be used in either step 14 or step 15 (option B in each case).

Option A (screw fastening): Use the second last page of this user manual as a template and mark the holes. Fasten three screws into the base cabinet (take into account the thickness of the cabinet side wall). Attach the control box to the screws.


Option B (adhesive attachment): Attach the control box with the enclosed Velcro strips: Clean the surfaces where the adhesive strips will be attached (e.g. with alcohol). The surfaces must be free of dust and grease to ensure a good adhesive bond. Attach the Velcro adhesive strips to the control box rear. Removed protective film. Affix the control box to the chosen location (on the cleaned surface).

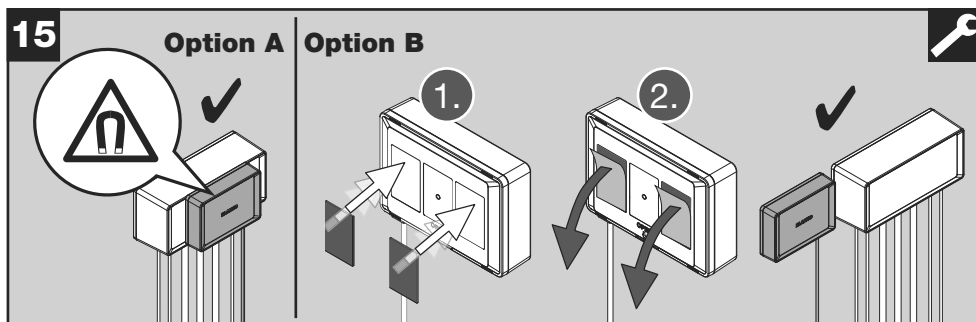


Installing the battery box:

Option A (attachment with magnet): Place the battery box on the front of the control box. The battery box automatically attaches itself to the control box thanks to the integrated magnets.


Option B (adhesive attachment): Attach the battery box with the enclosed Velcro strips: Clean the surfaces where the adhesive strips will be attached (e.g. with alcohol). The surfaces must be free of dust and grease to ensure a good adhesive bond. Attach the Velcro adhesive strips to the battery box rear. Removed protective film. Affix the battery box to the chosen location (on the cleaned surface).

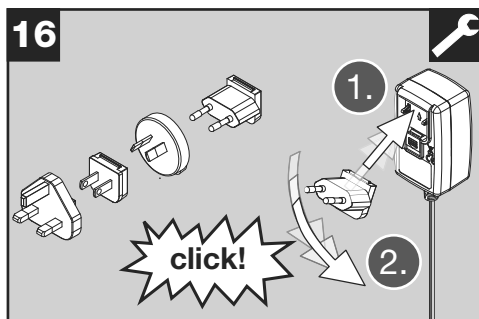

Plug the right adapter into the mains adapter and snap it into place.

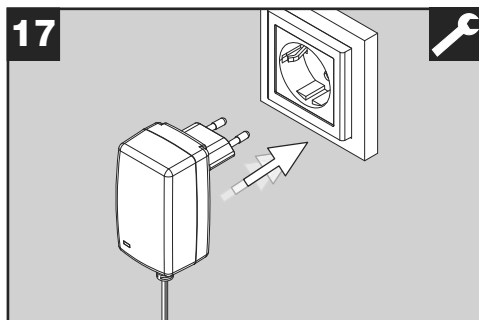

Connect the plug-in mains adapter into the socket outlet.

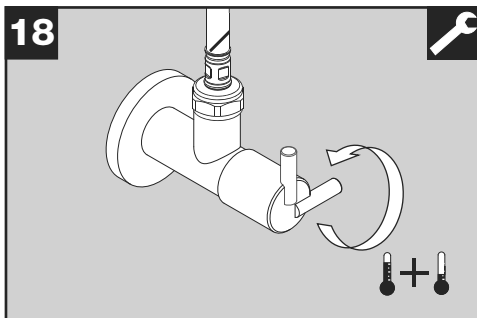


Fully open both corner valves.


NOTICE!

Check all connections for leaks!

4.4 Preparing the mixer tap for first use

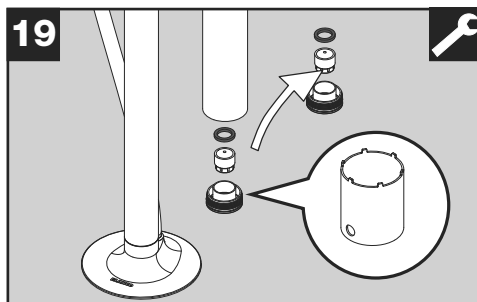


Remove the flow regulator from the spray head (spanner is supplied with the mixer tap).

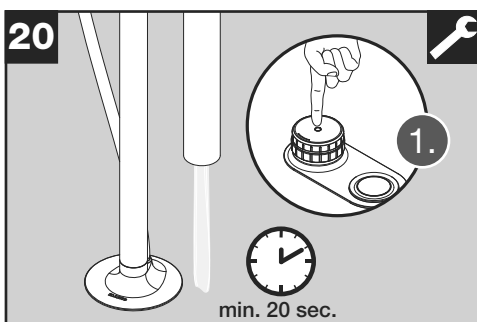

Purge mixer tap and pipelines thoroughly with water (hot and cold water; at least 20 seconds).

The description of how to select and activate the water types on the mixer tap can be found in the mixer tap's operating instructions (instruction number 2).

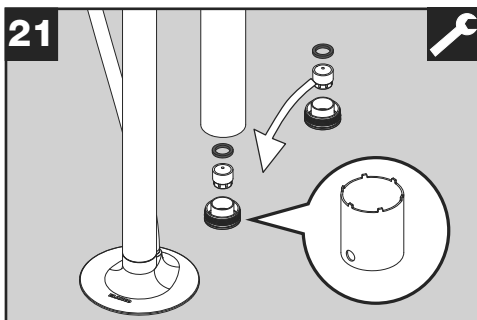

Stop the water flow and reinstall the flow regulator.



Please hand over the following to the system owner:

- the assembly and operating instructions (usually two documents)
- the flow regulator key(s) for the mixer tap.

Explain to the user how the mixer tap works. Familiarise the user with the use and go through the operating instructions (manual 2) with them.

5. Shutting down

- ▶ Close both corner valves.
- ▶ Detach all cables from the control box.

NOTICE!

When disconnecting water-conveying hoses, small amounts of water may leak out!

- ▶ Unscrew hoses to the control box and to the corner valves.
- ▶ Undo installation nuts and remove mixer tap / control unit.

6. Disposing of the mixer tap

You are legally obliged to avoid generating waste and protect your health and the environment:

- ▶ Return the product to a collection point. Do NOT dispose of the product in general household waste.

Dealers will take the mixer tap back free of charge.




7. Customer service

If you have any questions or complaints, please contact your dealer or our customer service → see rear.

For more information and spare parts, please visit the BLANCO online shop:
blanco.com/shop-luneoo



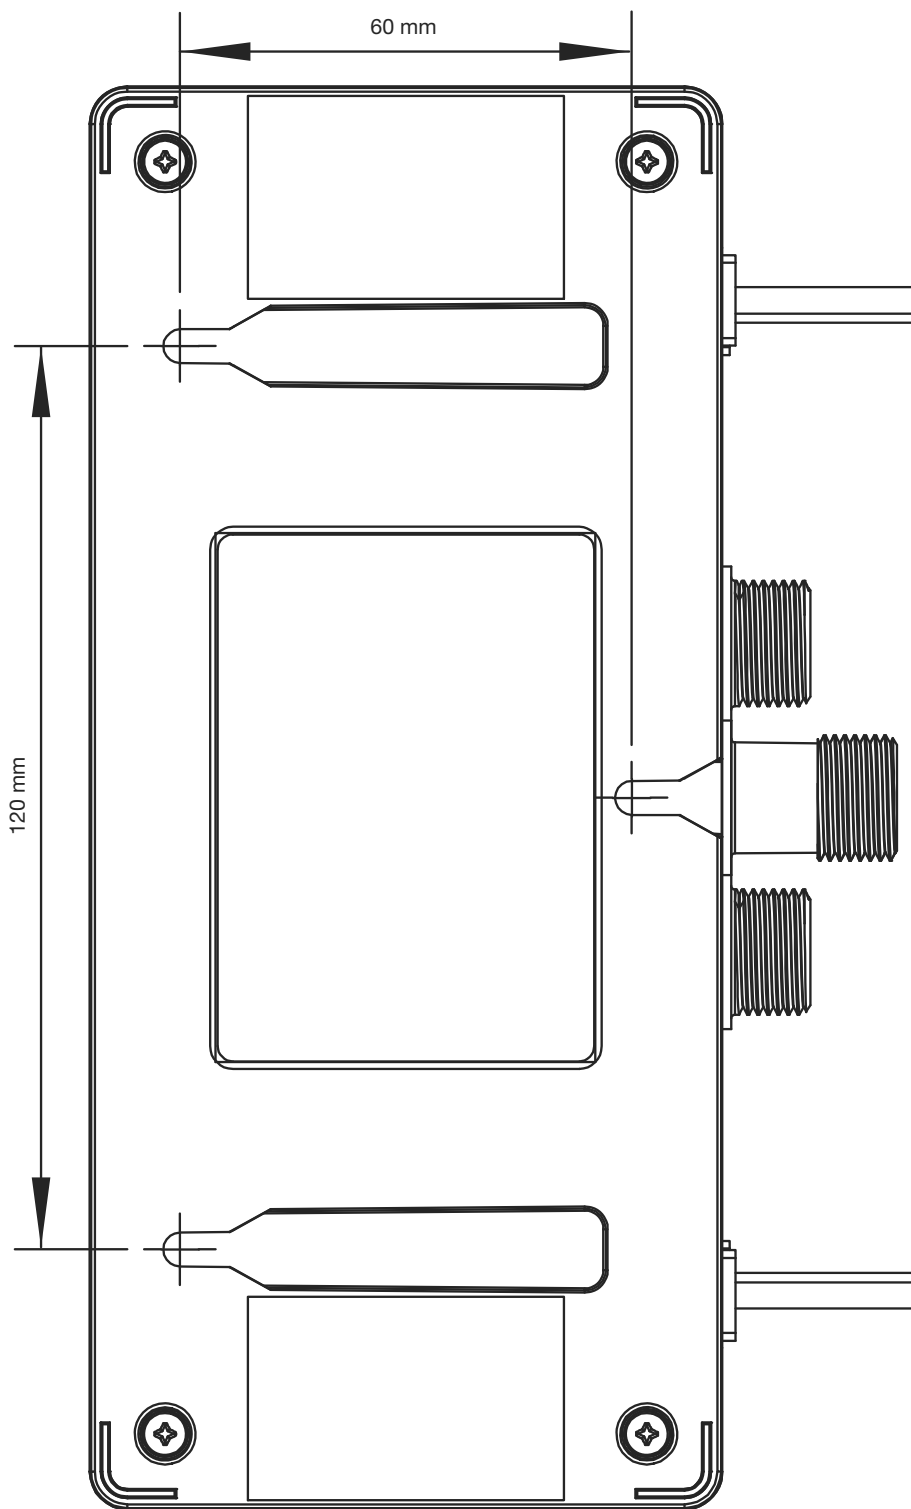



blanco.com/contact-luneoo

BLANCO GmbH + Co KG
Flehinger Str. 59
75038 Oberderdingen
Germany
Tel.: +49 7045 44-81 419
service@blanco.com

BLANCO Austria Küchentechnik GmbH
Ignaz-Köck-Straße 11
1210 Wien
Austria
Tel.: +43 1 2782823
office@blanco.at

Blanco UK Limited
1 Victor Way
Colney Street
St. Albans, AL2 2FL
Great Britain
Phone: +44 1923 635 200
aftersales@blanco.co.uk